

Level Control Valve with Bi-Level Vertical Float

- Reservoir filling
 - Very low supply-pressure
 - Low noise generation
 - Energy cost-critical systems
 - Systems with poor water quality
- Reservoir outlet
 - Distribution routing
 - Sewerage “fill and flush” systems

The Model 750-66-B Level Control Valve with Bi-Level Vertical Float is a hydraulically-controlled, diaphragm-actuated, double-chambered control valve. The valve is hydraulically powered to fully open at pre-set reservoir low-level, and to shut-off at pre-set high level regardless of valve differential pressure.




Features and Benefits

- **Line-pressure driven** – independent operation
- **Bi-level hydraulic float control**
 - On/Off service
 - Low cavitation damage
 - Suitable for low-quality water
 - Inherent reservoir refreshing
- **Double chamber**
 - Full-powered opening & closing
 - Decreased pressure loss
 - No throttling noise
 - Non-slam closing characteristic
 - Protected diaphragm
- **External installation**
 - Easy access to valve & float
 - Easy level setting
 - Less wear and tear
- **Balanced seal disk** – high flow capacity
- **In-line serviceable** – easy maintenance
- **Flexible design** – easy addition of features

Major Additional Features

- Pressure-sustaining – 753-66
- Electric float backup – 750-66-65
- Flow control – 757-66-U
- Closing surge prevention – 750-66-49
- Level sustaining – 75A-66

See relevant BERMAD publications



Operation


The Model 750-66-B is a float-controlled valve equipped with a 4-way, "last position", bi-level float pilot assembly. The float [1] slides along the rod [2]. When the float reaches either the adjustable high [3] or low [4] level stoppers, it either pulls the rod assembly down or pushes it up, switching the float pilot [5] position. When the float is between the adjustable stoppers, the main valve remains in its last position.

At high level, the float pilot applies pressure to the upper control-chamber [6], and vents the lower control-chamber [7], powerfully shutting off the main valve.


At low level, the float pilot applies pressure to the lower control-chamber, and vents the upper control chamber, powerfully opening the main valve.

For 10" valves and larger, two accelerators [8 & 9] quickens valve response.

Size range-1 1/2"-8"

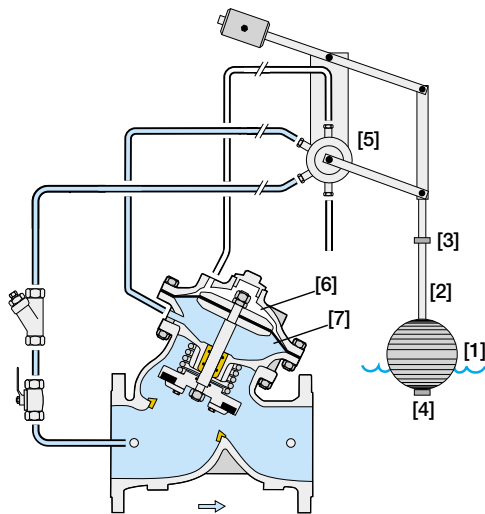

Size range-10-20"

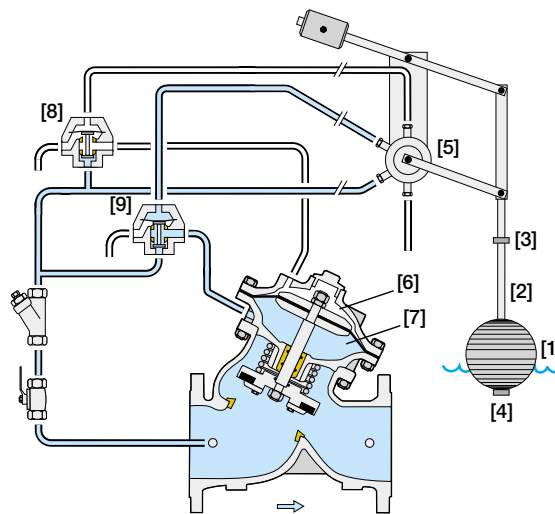

Tender Specifications


The Level Control Valve shall be double-chambered to power fully open at pre-set low level, and to shut-off at pre-set high level regardless of valve differential pressure.

Main Valve: The main valve shall be a center-guided, diaphragm-actuated, globe valve of either oblique (Y) or angle pattern design. The body shall have a replaceable, raised, stainless steel seat ring. The valve shall have an unobstructed flow-path, with no stem guides, bearings, or supporting ribs. The body and cover shall be ductile iron. All external bolts, nuts, and studs shall be Duplex® coated. All valve components shall be accessible and serviceable without removing the valve from the pipeline.

Actuator: The actuator assembly shall be double-chambered with an inherent separating partition between the lower surface of the diaphragm and the main valve. The entire actuator assembly (seal disk to top cover) shall be removable from the valve as an integral unit. The stainless steel valve-shaft shall be center-guided by a bearing in the separating partition. The replaceable radial seal disk shall include a resilient seal and shall be capable of accepting a V-Port Throttling Plug by bolting.

Control System: The control system shall consist of a 4-way, "last position", adjustable bi-level, hydraulic float pilot assembly, an isolating cock valve, (for 10" valves and larger: two accelerators), and a filter. All fittings shall be forged brass or stainless steel. The assembled valve shall be hydraulically tested.

Quality Assurance: The valve manufacturer shall be certified according to the ISO 9001 Quality Assurance Standard. The valve shall be certified as a complete drinking water valve according to NSF, WRAS, and other recognized standards..



Typical Applications

Infrastructure Reservoirs


Optimal design of reservoir systems requires specifying a level control valve that reduces pumping costs by minimizing the extra pumping pressure required to operate standard valves.

Even at very low pressure, the Model 750-66-B ensures full opening, maximum flow capacity, and secure closing. It should be included during the system design phase or with changing needs.



Pumping to Uphill Reservoir

In a reservoir system, where a **pump provides pressure**, consumers are prioritized over reservoir filling by installing the **Model 753-66** Level Control and Pressure-Sustaining Valve.

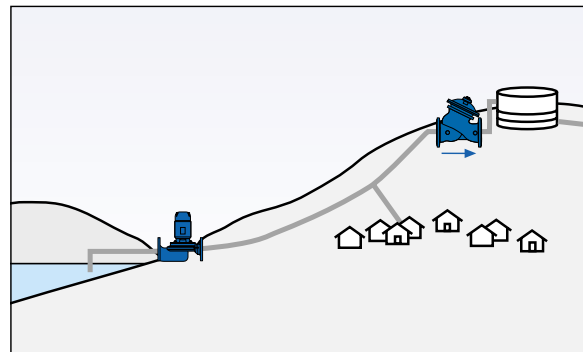


Gravity-Filling a Downhill Reservoir


Where a **reservoir provides pressure** to consumers and fills a low-lying reservoir, the consumers should be prioritized over filling the lower reservoir.

Defining the pressure set-point for the standard level control and pressure-sustaining valve is usually impossible, as there is only a very small potential differential pressure to operate the valve.

The solution: Rather than controlling the pressure during filling, control the filling flow ensuring sufficient pressure for consumers.

Install the **Model 757-66-U** Level and Flow Control Valve.

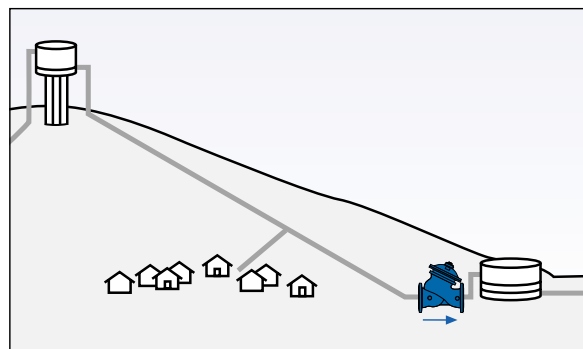




Typical Level Control Systems in Hi-Rise Buildings


Water supply system design requirements for hi-rise buildings present unique issues:

- Supply cut-off is unacceptable and single source supply is common.
- Reservoir overflow might be extremely expensive and even dangerous.
- Reservoirs are often located next to prestigious residential and office space. Extraneous noise and maintenance activities are to be avoided.
- Most of the occupants of hi-rise buildings are completely dependent on the reservoir system of the building for their water needs: potable water, firewater, air conditioning system, flushing, etc.
- Pressure for upper floors consumers and for fire-protection systems must be prioritized during reservoir filling.
- As reservoir systems are designed to meet maximum (emergency) consumption, although actual consumption is usually far less, there is a risk of stagnant reservoir water.

The Model 750-66-B together with BERMAD'S accumulated know-how addresses these issues and present appropriate solutions.

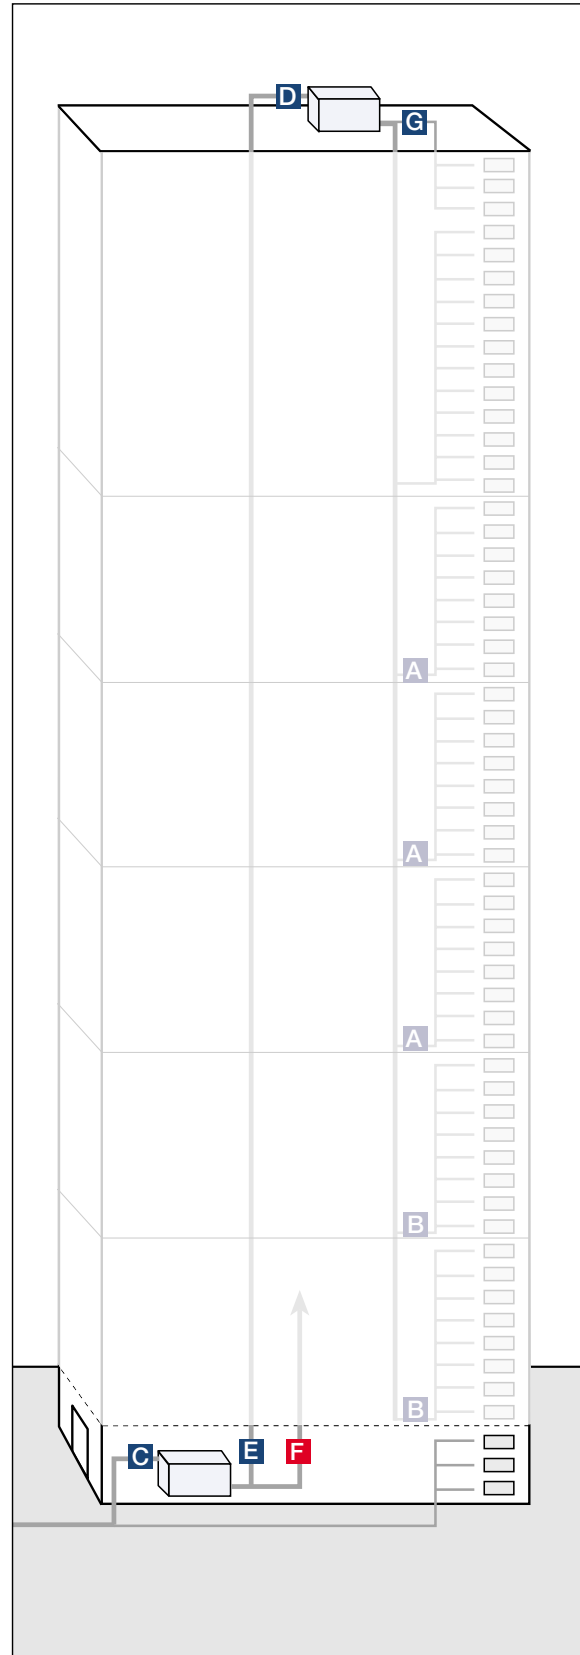

- A** Higher-zone pressure reducing system installation
- B** Lower-zone pressure reducing system (two-stage) installation
- C** Bottom reservoir level control system
- D** Roof reservoir level control system
- E** Potable water pumping system
- F** Fire protection pumping system
- G** Upper floors pumping system



Rooftop Reservoirs

Rooftop reservoir level control is attained by electric control of the basement pumps according to reservoir level. As overflow of a rooftop reservoir can cause costly damage, hydraulic back-up protection is recommended.

The Model 750-66-B is suited to this function. When open, it presents minimal interference, but when needed, it shuts-off securely.

To prioritize pressure to upper floor consumers or fire protection system, install the Model 730 Pressure-Sustaining Valve upstream from the Model 750-66-B.




Basement Reservoirs

Basement reservoir design requires consideration of specific issues:

- Supply cut-off is unacceptable.
- Reservoir overflow might damage expensive equipment.
- Noise level* and duration should be limited.
- Municipal supply pressure might be low.


The Model 750-66-B, as part of the system shown, fulfills these requirements and more.

* For other measures that might be needed to further reduce system noise, see relevant BERMAD publications.

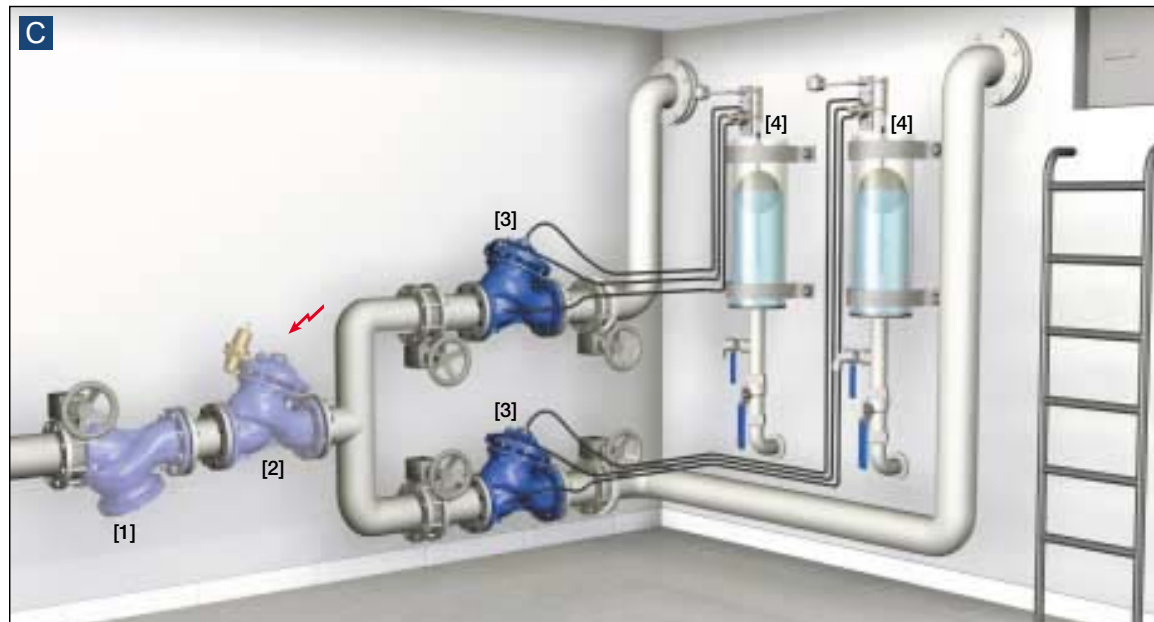

In addition to the Model 750-66-B, BERMAD recommends these systems include:

- [1] Strainer Model 70F: prevents debris from damaging valve operation.
- [2] Pressure-Sustaining Valve Model 730-65: ensures municipal supply to lower floors & provides electric back-up.
- [3] Parallel Redundant Branch Model 750-66-B: ensures uninterrupted supply.
- [4] Float Assembly: out-of-tank installation.




700 Series Model 750-66-B

Technical Data


Dimensions and Weights

Size	A, B		C		L		H		Weight		
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs
40	1 1/2"	350	14	180	7	205	8.1	239	9.4	9.1	20
50	2"	350	14	180	7	210	8.3	244	9.6	10.6	23
65	2 1/2"	350	14	180	7	222	8.7	257	10.1	13	29
80	3"	370	15	230	9	250	9.8	305	12.0	22	49
100	4"	395	16	275	11	320	12.6	366	14.4	37	82
150	6"	430	17	385	15	415	16.3	492	19.4	75	165
200	8"	475	19	460	18	500	19.7	584	23.0	125	276
250	10"	520	21	580	23	605	23.8	724	28.5	217	478
300	12"	545	22	685	27	725	28.5	840	33.1	370	816
350	14"	545	22	685	27	733	28.9	866	34.1	381	840
400	16"	645	26	965	38	990	39.0	1108	43.6	846	1865
450	18"	645	26	965	38	1000	39.4	1127	44.4	945	2083
500	20"	645	26	965	38	1100	43.3	1167	45.9	962	2121

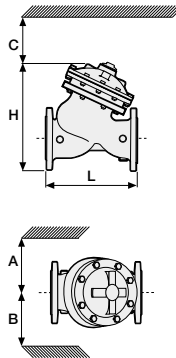

Data is for Y-pattern, flanged, PN16 valves
 Weight is for PN16 basic valves
 "C" enables removing the actuator in one unit
 "L", ISO standard lengths available
 For more dimensions and weights tables, refer to Engineering section

Flow Chart

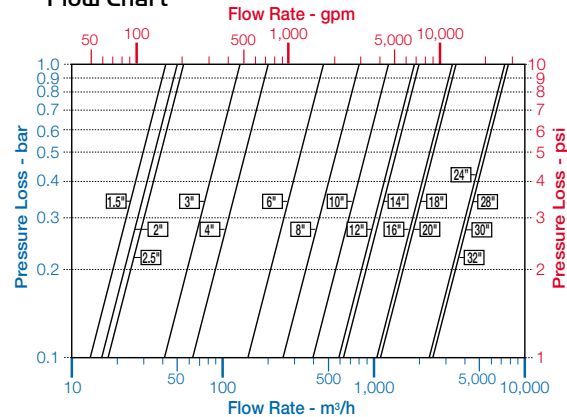

Data is for Y-pattern, flat disc valves
 For more flow charts, refer to Engineering section

Main Valve

Valve Patterns: "Y" (globe) & angle
Size Range: 1 1/2"-32" (40-800 mm)
End Connections (Pressure Ratings):
Flanged: ISO PN16, PN25 (ANSI Class 150, 300)
Threaded: BSP or NPT
Others: Available on request
Working Temperature:
 Water up to 80°C (180°F)
Standard Materials:
Body & Actuator: Ductile iron
Internals:
 Stainless steel, bronze & coated steel
Diaphragm:
 NBR (Buna N) Nylon fabric-reinforced
Seals: NBR (Buna N)
Coating:
 Fusion Bonded Epoxy, RAL 5005 (Blue)
 NSF & WRAS approved or Electrostatic
 Polyester Powder, RAL 6017 (Green)

Control System

Standard Materials:
Accessories:
 Bronze, brass, stainless steel & NBR (Buna N)
Tubing: Copper or stainless steel
Fittings: Forged brass or stainless steel
Float Standard Materials
Pilot body: Brass
Seals: NBR (Buna N)
Internals: Stainless steel & Brass
Lever system: Brass
Float: Plastic
Float rod: Stainless steel
Base plate: Fusion bonded epoxy coated steel
Optional materials: Stainless steel metal parts and float, FPM (Viton®) seals

- Minimum level differential: 15 cm (6")
- Maximum level differential: 54 cm (21")
- Each extension rod adds 56 cm (22"), one extension rod supplied
- Extra counterweight required if second extension rod used
- See Bermad float installation recommendations
- If inlet pressure is below 0.7 bar (10 psi) or above 10 bar (150 psi), consult factory

How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide)

Sector	Size	Primary Feature	Additional Feature	Pattern	Body Material	End Connections	Coating	Voltage & Position	Tubing & Fittings	Additional Attributes
WW	6"	750	66	Y	C	16	EB	-	CB	BVI
Waterworks	1 1/2" - 32"	Level Control	Oblique (up to 20") Angle (up to 18") Globe (24-32" only)	Y A G	Polyester Green Polyester Blue Epoxy FB Blue Uncoated	24VAC/50Hz - N.C. 24VAC/50Hz - N.O. 24VDC - N.C. 24VDC - N.O. 24VDC - L.P. 220VAC/50-60Hz N.C. 220VAC/50-60Hz N.O.	PG PB EB UC	Copper Tubing & Brass Fittings Plastic Tubings & Brass Fittings St. St. 316 Tubing & Fittings	CB PB NN	Double-Chambered Valve Position Indicator Large Control Filter V-Port Throttling Plug Orifice Assembly Electric Limit-Switch St. St. 316 Control Accessories St. St. 316 Internal Trim (Closure & Seat) St. St. 316 Actuator Internal Assembly Delrin Bearing Viton Elastomers for Seals & Diaphragm
Closing Surge Prevention	49		Ductile Iron Standard	C						B
Modulating Horizontal Float	60		Cast Steel	S						I
Bi-Level Electric Float	65		St. Steel 316	N						F
Bi-Level Vertical Float	66		Nickel Alumin. Bronze	U						V
Modulating Vertical Float	67									U
Altitude Pilot	80									S
Modulating Altitude Pilot	82									N
Sustaining Altitude Pilot	83									T
Bi-Level Altitude Control	86									D
2-14 meter Setting Altitude Pilot	M6									R
5-22 meter Setting Altitude Pilot	M5									E
15-35 meter Setting Altitude Pilot	M4									
25-70 meter Setting Altitude Pilot	M8									

Multiple choices permitted

Use when electric control additional feature is selected

Multiple choices permitted