




CC6360 & CC6360P* COMPACT CABINET COOLER AIR-TO-WATER FLUSH MOUNT MODEL

Model	Weight	Rating @ 40°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size 3 x 6"	Dimensions-Inches (H x W x D)
CC6360	32 lbs	21,800	0.9	3 x 6"	29 x 13-7/8 x 7-7/8

Efficiency : 159.7 Watts / °C ΔT based on average internal cabinet temperature.



Available upon request

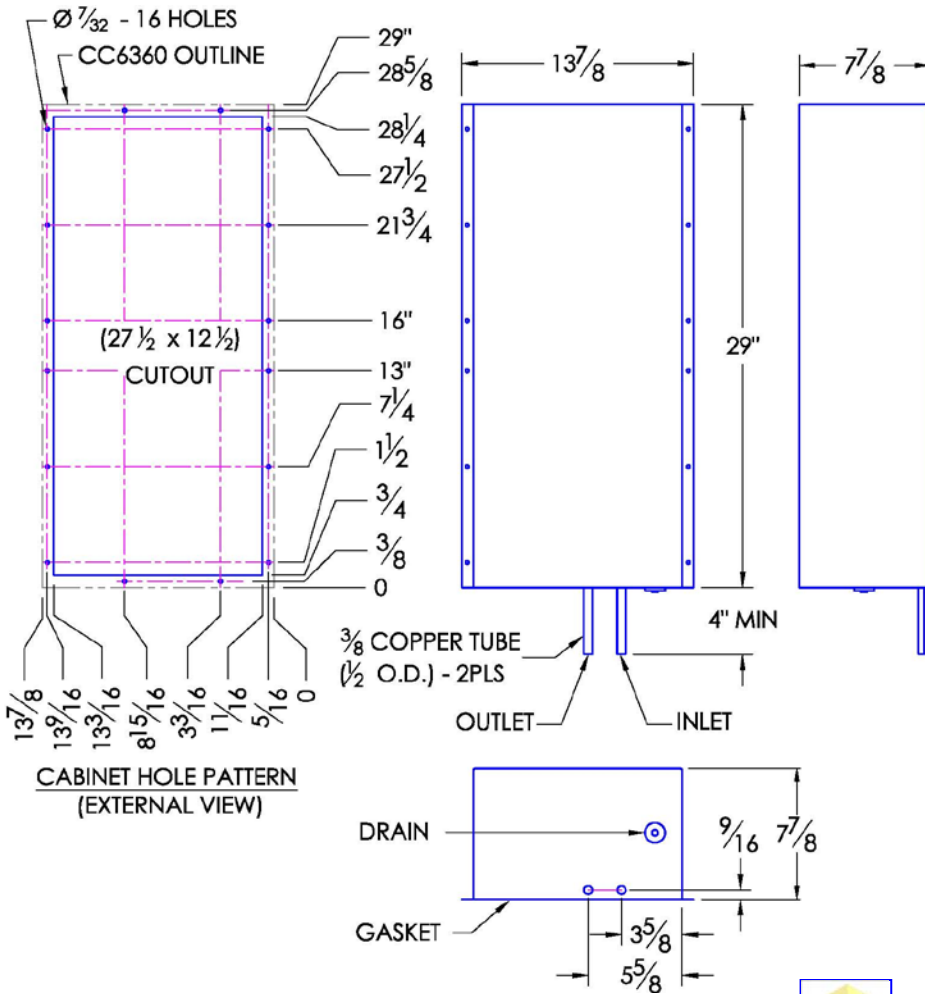

[SEE HOW CABINET COOLERS WORK – CLICK HERE >>](#)

SPECIFICATIONS

1. RATED COOLING: 6,388 WATTS (MOUNTED TO AN UNINSULATED 72" x 36" x 24" CABINET WITH 1 GPM OF WATER AT 20°C, 40°C AMBIENT AIR AND 60°C CABINET AIR TEMPERATURE).
2. DESIGNED FOR SURFACE MOUNTING ON THE OUTSIDE OF CABINET.
3. ALUMINUM HOUSING (COLOR IS BLACK) OR STAINLESS STEEL.
4. EXTERNAL WATER INLET & OUTLET CONNECTIONS.
5. EQUIPPED WITH MOUNTING GASKET TO MAINTAIN AIR TIGHT SEAL.
- * 6. "P" UNIT IS PRESSURE TESTED TO ASSURE WATER TIGHT SEAL.
7. UL / cUL LISTED UNITS ALSO AVAILABLE UPON REQUEST (UL FILE # SA9567).
8. AVAILABLE WITH 115VAC, 230VAC, AND 12VDC, 24VDC, 48VDC FANS.
9. VERTICAL MOUNTING ONLY
10. COOLANT WATER PRESSURE: THIS UNIT IS PRESSURE TESTED TO 100 PSI. SAFE WORKING PRESSURE IS 60 PSI.
11. RECOMMENDED COOLANT FLOW RATE (GALLONS PER MINUTE): 1 GPM



Outside View



Inside View



CC6360 & CC6360P*

883315