


CC601F-WL* HOSEDOWN COMPACT CABINET COOLER AIR-TO-AIR FLUSH-MOUNT MODEL

Model	Weight	Rating @ 20°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size	Dimensions-Inches (H x W x D)
CC601F-WL	14 lbs	3,300	0.6	2 x 6"	30 x 8-3/4 x 4

Efficiency: 49.4 Watts / °C ΔT based on average internal cabinet temperature.

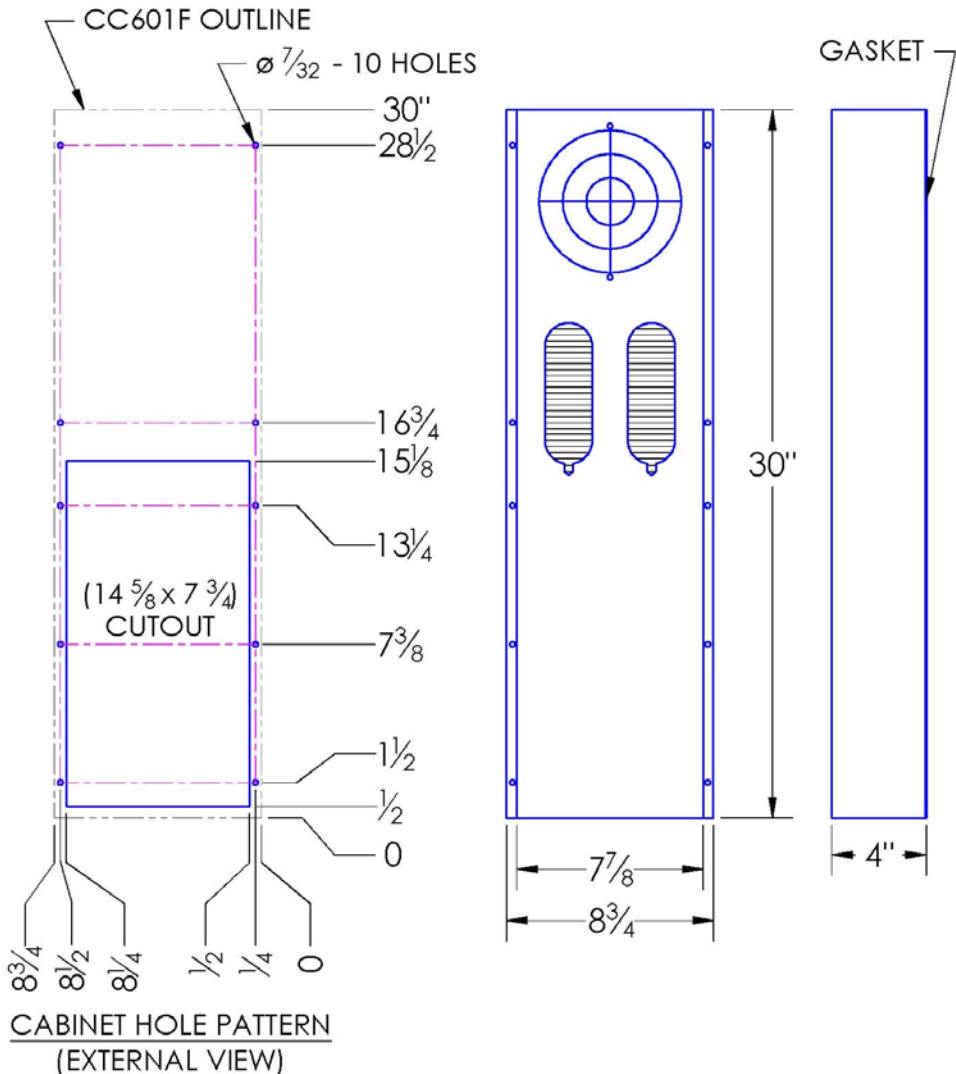

SPECIFICATIONS

- Unit and options are UL Listed for hosedown environments (TYPE 4 / INDOOR ONLY).
- CC601F Rated cooling: 988 Watts at 20°C ΔT (49.4 W/°C, mounted to an uninsulated 72" x 36" x 24" cabinet.)
- Designed for surface mounting on outside of cabinet.
- Housing is aluminum (color is black). Stainless steel is available.
- Equipped with mounting gasket to maintain the TYPE 4 integrity of your cabinet.
- Pressure tested to insure liquid tight seal.
- * 7. "WET LOCATION FAN" (-WL) is required for "HOSEDOWN" applications.**
- Internal 6-ft. power cord with 3-prong plug is standard for AC powered units.
- Available with VAC (115 & 230) and VDC (12, 24, & 48) fans. DC powered units include junction box, consult website.
- Unit must be mounted vertically (as shown) in wet environments.
- Optional: inlet air-filter kit available upon request.
- 12. For design, quote, and sizing assistance: call (888) 754-6329.**

Subject to change without notice.



THERMAL SOLUTIONS
NOREN
 Products Incorporated

Pelmar Engineering Ltd.
 Tel. (888) 754-6329
 sales@pelmareng.com
 www.pelmareng.com

CC601F-WL* HOSEDOWN

CCS-PBD-7.2.2-883361-A