


CC600F TYPE 12 COMPACT CABINET COOLER AIR-TO-AIR FLUSH-MOUNT MODEL

Model	Weight	Rating @ 20°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size	Dimensions-Inches (H x W x D)
CC600F	14 lbs	3,300	0.6	2 x 6"	30 x 8-3/4 x 4

Efficiency: 49.4 Watts / °C ΔT based on average internal cabinet temperature.

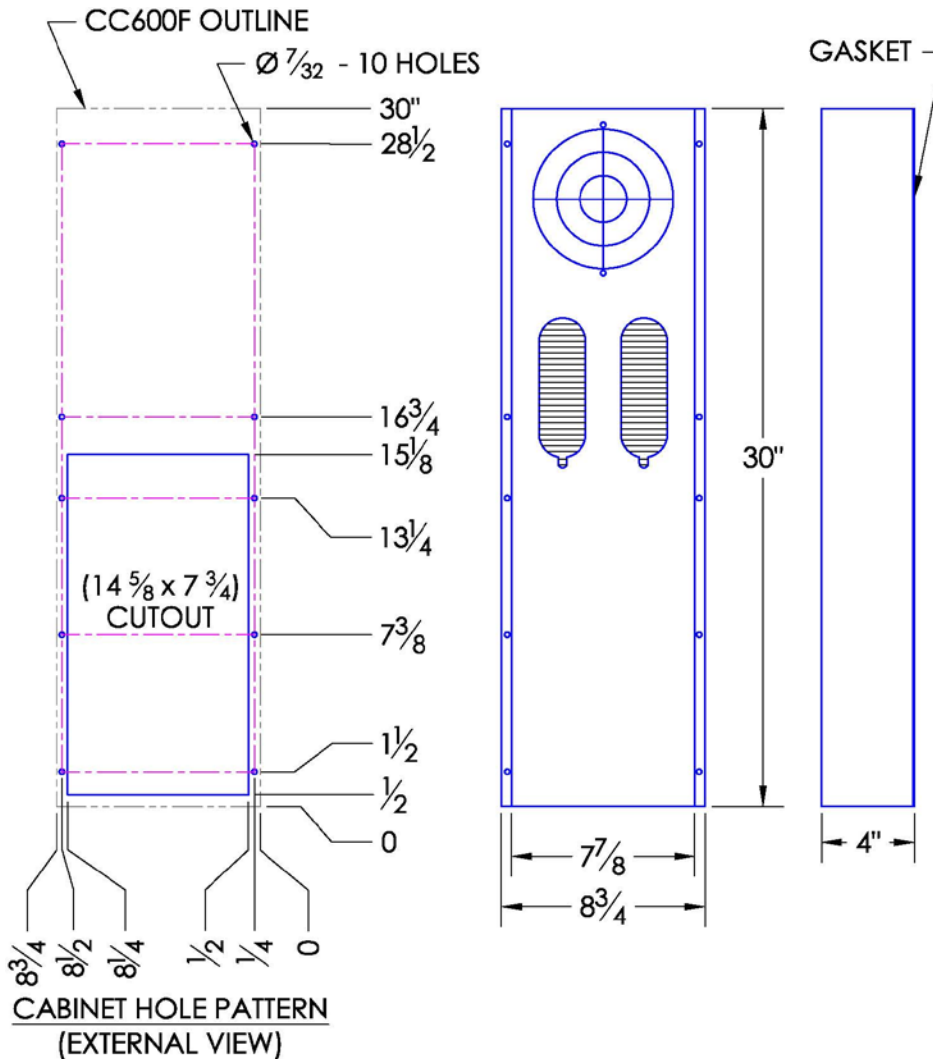

SPECIFICATIONS

1. UL Listed for TYPE 12 environments.
2. CC600F Rated cooling: 988 Watts at 20°C ΔT (49.4W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
3. Designed for surface mounting on outside of cabinet.
4. Housing is aluminum (color is black). Stainless steel is available.
5. Equipped with mounting gasket to maintain air tight seal.
6. Available with AC (115 & 230V) and DC (12, 24, & 48) fans. DC version includes junction box, consult website.
7. Vertical and horizontal mounting ok.
8. Optional: inlet air-filter kit available upon request.
9. For design, quote, and sizing assistance: call (888) 754-6329.

Subject to change without notice.



THERMAL SOLUTIONS
NOREN
 Products Incorporated

Pelmar Engineering Ltd.
 Tel. (888) 754-6329
 sales@pelmareng.com
 www.pelmareng.com

CC600F TYPE 12

CCS-PBD-7.2.2-883349-A